

GEBERIT SIGMA40 ACTUATORS

For Sigma Concealed Tanks, 2x6 and 2x4 Installations

SPECIFICATIONS

Actuators for concealed tank and carrier system. Actuator flush plates and push buttons shall be glass or stainless steel. All components shall be compliant with applicable codes and product standards.

FEATURES

- Designed to maintain appearance push after push
- Moving parts are accessible behind actuator flush plate
- Made of glass or stainless steel
- Available in a variety of unique combinations of finish/color
- Stainless steel versions come with easy-to-clean coating
- Incorporates water saving possibilities when used with Geberit dual-flush tanks 1.6 GPF (6 LPF) and 0.8 GPF (3 LPF) or 1.28 GPF (4.8 LPF) and 0.8 GPF (3 LPF)
- Includes mounting frame and hardware

WARRANTY

- One-year limited warranty

Dual-Flush Actuators, Sigma 2x6 and 2x4 Installation



Sigma40 Square



Sigma40 Round

Surface Material	Frame Finish/Color	Model No.	Model No.
Stainless	Brushed Stainless	115.629.FW.1	115.628.FW.1
	Matte Black	115.629.14.1	115.628.14.1
	Matte White	115.629.JT.1	115.628.JT.1
	Brushed Red Gold	115.629.QB.1	115.628.QB.1
	Brushed Black Chrome	115.629.QD.1	115.628.QD.1
Glass	Brushed Brass	115.629.QF.1	115.628.QF.1
	White Glass	115.629.SI.1	115.628.SI.1
	Black Glass	115.629.SJ.1	115.628.SJ.1
	Lava Glass	115.629.JK.1	115.628.JK.1
	Grey Sand Glass	115.629.JL.1	115.628.JL.1

Products marked with comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.




Geberit
2100 S. Clearwater Drive
Des Plaines, IL 60018
USA

P 847.803.5000


www.geberitnorthamerica.com

DIMENSIONS

Sigma40 Square Dual-Flush

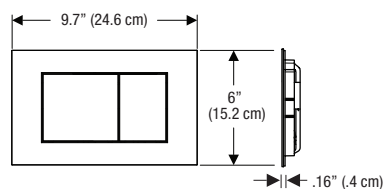

Sigma40 Round Dual-Flush

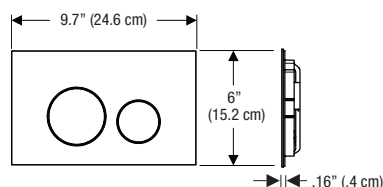

ARCHITECT/ENGINEER APPROVAL

Job Name: _____

Date: _____ Quantity: _____

Model Specified: _____

Variations Specified: _____

Customer/Wholesaler: _____

Contractor: _____

Architect: _____